
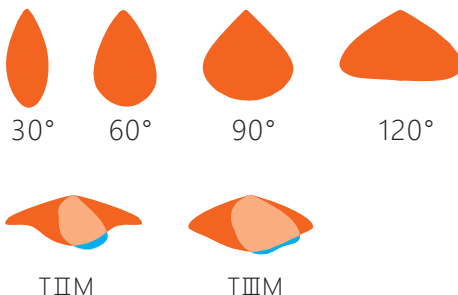
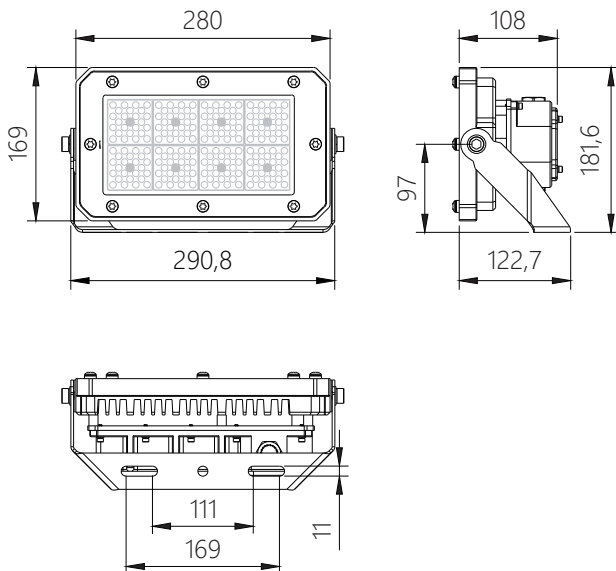


FL8-DC-50W Explosion-proof Floodlight

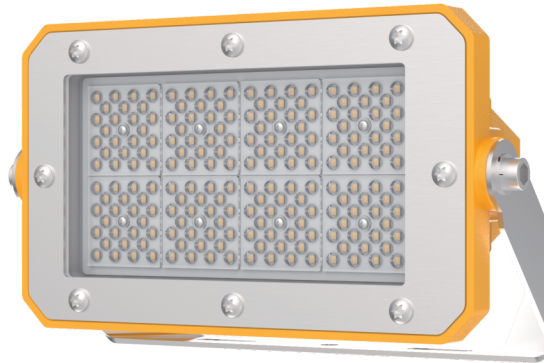

ATEX: II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T80°C Dc

ATEX Certificate NO: TÜV CY 26 ATEX 0207611 X

Gas: Zone 2

Dust: Zone 22

DC Input: 12-24VDC

CRI Range: Ra>80

CCT Range: NW(4000K), CW(5700K)

Beam Angle: 30°, 60°, 90°, 120°, T2M, T3M

Light Efficiency: 150±5% Lm/W

Protection grade: IP66 & IK10

Shell material: Aluminum+Stainless Steel+PC

protective cover: organic glass, Stand 7J impact

corrosion-resistant grade: C3

Light body color: RAL1021

Electrical Connections: 3 wire and earth cable size
2.5mm² max. Through wiring versions available

L80B20@25°C : >100000h

Self-testing Emergency: NA

Allowable Temperature: -20°C - +55°C

Cable Entries: 2xM20x1.5

Warranty: 5 year

Code No.	Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Dimensions (mm)	Pcs/Pack	N.W. (kg)	G.W. (kg)
XJ-EX-N-FL8-DC-50W	50	7500	150	291x182x123	1	5.0	6.2