


BAJ52 Explosion-proof Emergency Light

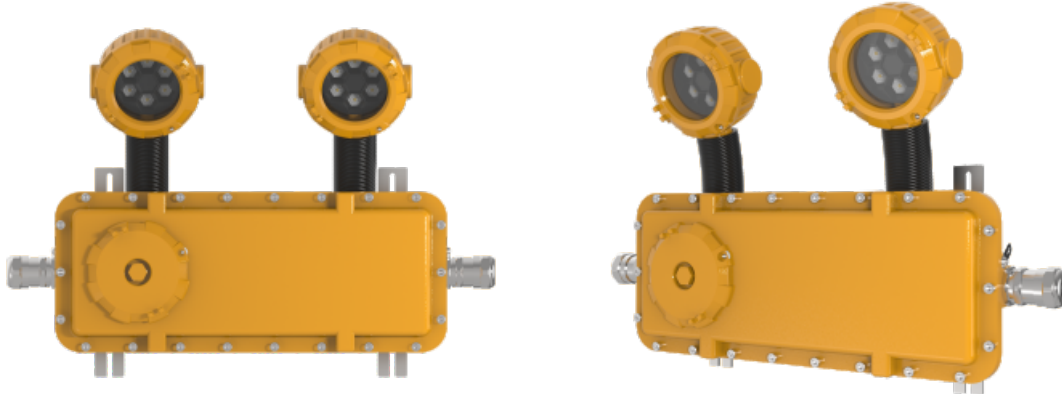

ATEX: Ex II 2G Ex db IIB T6 Gb
Ex II 2D Ex tb IIIC T80°C Db

IECEX: Ex db IIB T6 Gb
Ex tb IIIC T80°C Db

Gas: Zone 1, 2
Dust: Zone 21, 22

AC Input: 100-277V, 50/60Hz

Emergency Time: 3h

CRI Range: Ra>80

CCT Range: 5700K

Protection grade: Ip67 & IK10

Shell material: Aluminum+Stainless Steel+glass

protective cover: Tempered glass

corrosion-resistant grade: C3

Light body color: RAL9010

Electrical Connections: 3 wire and earth cable size


4mm² max. Through wiring versions available

L80B20@25°C : >100000h

Allowable Temperature: -20°C - +40°C

Cable Entries: 2xM25x1.5

Warranty: 5 year

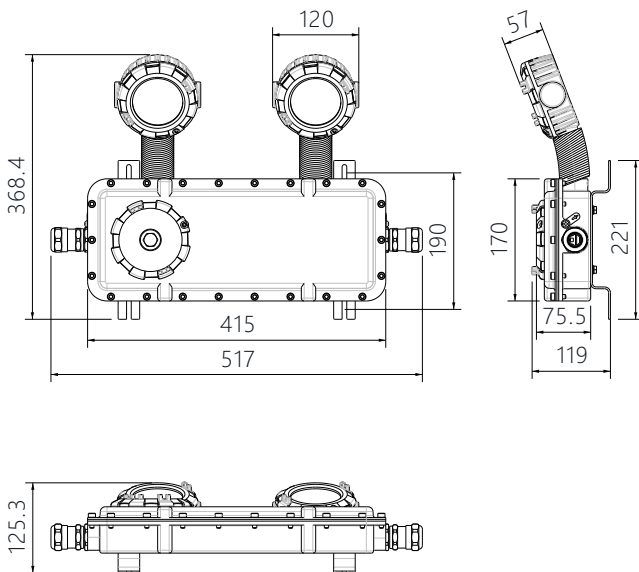

Code No.	Power (W)	Dimensions (mm)	Pcs/Pack	N.W. (kg)	G.W. (kg)
XJ-EX-D-BAJ52	2x3W	517x368.4x125.3	1	6.2	7.0